



Product Features

The GFTK Series Multi-Cartridge Filter Housings feature an innovative sealing system that accommodates both single and double open-end cartridges for maximum flexibility in filter selection. Designed for operating pressures up to 150 psig, the housings accept seven 10", 20", 30", or 40" cartridges and are available in 304 or 316 stainless steel for excellent corrosion resistance. An operator-friendly V-clamp closure enables quick cartridge changeouts, with optional electropolished finishes and 3, 5, 7, 9, and 12-round configurations also available.

Housing Specifications



	A	S
Head:	304 Stainless Steel	316 Stainless Steel
Shell:	304 Stainless Steel	316 Stainless Steel
Vent Cap:	304 Stainless Steel	316 Stainless Steel
Drain Plug:	304 Stainless Steel	316 Stainless Steel
Bottom Seat Plate:	304 Stainless Steel	316 Stainless Steel
Internal Components:	304 Stainless Steel	316 Stainless Steel
Shell O-Rings:	Standard:	EPDM
	Optional:	Viton, Teflon Encapsulated Viton, Silicone
Connections:		
Inlet/Outlet:		1.5"-3" NPT, Ansi Flange
Vent:		1/4" NPT
Drain:		3/4" NPT

Performance Specifications

- Maximum Operating Pressure: 150 psig (10.3 bar) @ 200°F (93°C) in Liquid Service
- Not recommended for Gas Service.

DIMENSIONAL DATA

Model	Liquid Flow Rate GPM (lpm)	A Inches (mm)	B Inches (mm)	C Inches (mm)	D Inches (mm)	E Inches (mm)	Maximum Cartridge Diameter Inches (mm)	Weight lbs (kg)	Overhead Clearance for Cartridge Removal Inches (mm)
3GFTK1-1.5	to 15 (57)	23.0" (584)	11.1" (283)	5.0" (128)	6" (165)	12.3" (312)	2.75" (70)	21.8 (9.9)	29.6" (752)
3GFTK2-1.5	to 30 (114)	33.0" (838)	11.1" (283)	5.0" (128)	6" (165)	12.3" (312)	2.75" (70)	27.3 (12.4)	39.6" (1006)
3GFTK3-1.5	to 60 (171)	43.0" (1092)	11.1" (283)	5.0" (128)	6" (165)	12.3" (312)	2.75" (70)	33.1 (15)	49.6" (1260)
5GFTK1-2	to 25 (95)	23.5" (598)	11.1" (283)	5.0" (128)	8" (210)	14" (356)	2.75" (70)	33.1 (15)	19.8" (504)
5GFTK2-2	to 50 (190)	33.5" (852)	11.1" (283)	5.0" (128)	8" (210)	14" (356)	2.75" (70)	39.2 (17.8)	29.8" (758)
5GFTK3-2	to 75 (285)	43.5" (1106)	11.1" (283)	5.0" (128)	8" (210)	14" (356)	2.75" (70)	45.4 (20.6)	39.8" (1012)
5GFTK4-2	to 100 (380)	54.0" (1372)	11.1" (283)	5.0" (128)	8" (210)	14" (356)	2.75" (70)	53.1 (24.1)	59.8" (1520)
7GFTK1-2	to 35 (133)	24.0" (607)	11.1" (283)	5.0" (128)	9" (232)	14.9" (378)	2.75" (70)	34.2 (15.5)	29.8" (758)
7GFTK2-2	to 70 (266)	33.9" (861)	11.1" (283)	5.0" (128)	9" (232)	14.9" (378)	2.75" (70)	39.9 (18.1)	39.8" (1012)
7GFTK3-2	to 100 (375)	43.9" (1115)	11.1" (283)	5.0" (128)	9" (232)	14.9" (378)	2.75" (70)	46.1 (20.9)	49.8" (1266)
7GFTK4-2	to 125 (470)	54.3" (1379)	11.1" (283)	5.0" (128)	9" (232)	14.9" (378)	2.75" (70)	53.8 (24.4)	60.2" (1530)
9GFTK3-2.5	to 135 (513)	47.9" (1216)	14.6" (370)	6.3" (159)	10" (268)	16.5" (418)	2.75" (70)	48.7 (22.1)	73.7" (1872)
9GFTK4-2.5	to 180 (684)	58.3" (1480)	14.6" (370)	6.3" (159)	10" (268)	16.5" (418)	2.75" (70)	56.4 (25.6)	94.1" (2390)
12GFTK3-3	to 210 (794)	46.5" (1180)	13.0" (330)	6.7" (170)	12" (312)	18.1" (460)	2.75" (70)	54.0 (24.5)	52.1" (1323)
12GFTK4-3	to 240 (912)	56.5" (1434)	13.0" (330)	6.7" (170)	12" (312)	18.1" (460)	2.75" (70)	59.5 (27)	62.1" (1577)

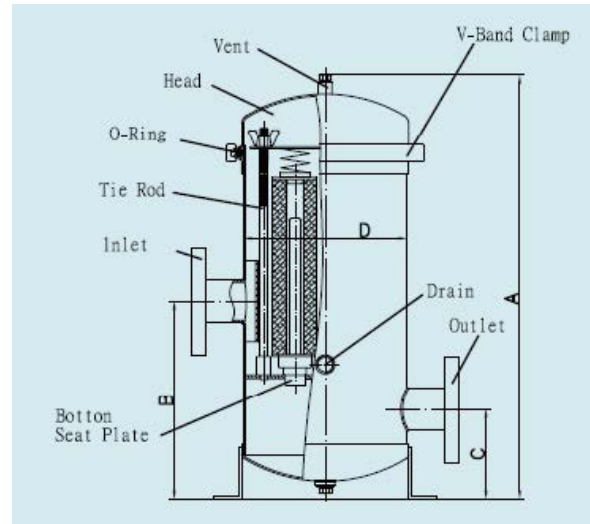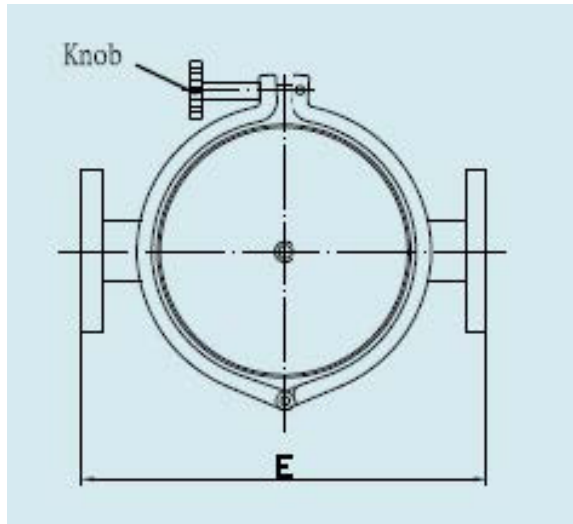

PRODUCT INFORMATION

# of Cartridges	Product Name	Cartridge Length	Material of Construction	Inlet/Outlet Connection Size	Connection Style	Shell O-Rings Materials
3, 5, 7, 9, 12	GFTK	1 = 10" 2 = 20" 3 = 30" 4 = 40"	A= SS304 S= SS316	1.5= 1.5" 2 = 2" 2.5 = 2.5" 3 = 3"	IP= NPT F= Flange	Blank= EPDM V= Viton T= TEV S= Silicone



CANADA WEST

3247 Roper Road NW
Edmonton, AB T6P 0G1
1-877-456-5760
saleswc@vytal.ca
www.vytal.ca

CANADA EAST

441 Applewood Crescent
Concord, ON L4K 4J3
1-888-233-1969
salesec@vytal.ca
www.vytal.ca

USA

345 E Tulare Ave
Visalia, CA 93277
1-424-222-7619
saleswusa@vytalusa.com
www.vytalusa.com